
Kitchen equipment layout

For commercial kitchen equipment vendors · plan at 1:25 on A3 · every item named and sized on the drawing

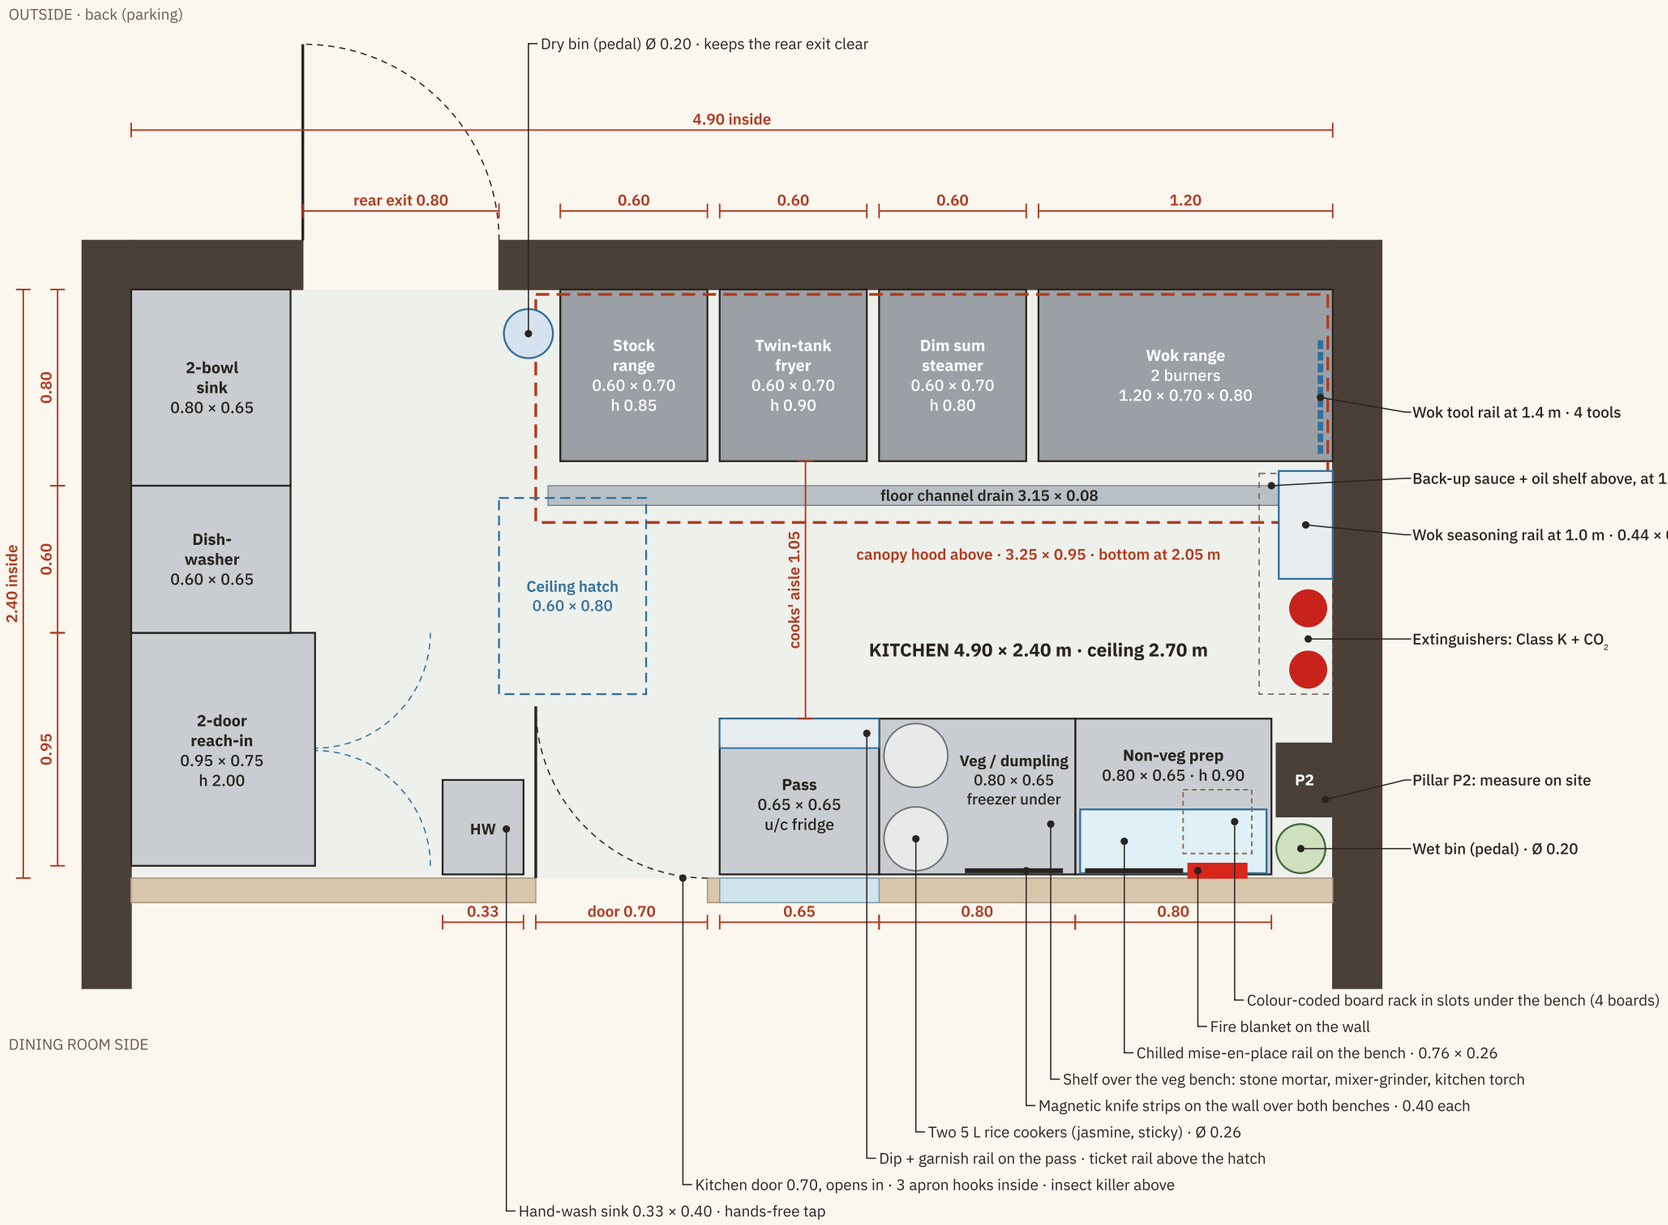

Equipment list

EQUIPMENT	W × D × H (m)	QTY
Wok range, 2 burners (Chinese)	1.20 × 0.70 × 0.80	1
Dim sum steamer, 2 holes	0.60 × 0.70 × 0.80	1
Twin-tank fryer (veg / non-veg)	0.60 × 0.70 × 0.90	1
Stock range, 2 burners	0.60 × 0.70 × 0.85	1
Canopy hood, baffle filters, suppression	3.25 × 0.95 × 0.55	1
Non-veg prep bench, undershelf, shelf over	0.80 × 0.65 × 0.90	1
Veg / dumpling bench, 2 shelves over	0.80 × 0.65 × 0.90	1
Under-counter freezer (in the veg bench)	2 doors	1
Pass bench + 2 heat lamps, u/c fridge under	0.65 × 0.65 × 0.90	1
Hand-wash sink, hands-free tap	0.33 × 0.40	1
2-door reach-in fridge	0.95 × 0.75 × 2.00	1
Under-counter dishwasher + drainboard	0.60 × 0.65 × 0.90	1
2-bowl sink + pre-rinse spray	0.80 × 0.65 × 0.90	1
Shelves over the dish line (top one slatted)	1.40 × 0.35	2
Bamboo steamer stacks (3 baskets + lid)	Ø 0.26	4
Wok seasoning rail, 8 pots + 8 bottles	0.44 × 0.22	1
Wok tool rail: ladle, spatula, spider, brush	0.47	1
Back-up sauce + oil shelf	0.90 × 0.30	1
Chilled mise-en-place rail, 5 pans	0.76 × 0.26 × 0.22	1
Dip + garnish rail (5 inserts)	0.65 × 0.12	1
Ticket rail over the pass hatch	0.65	1
Magnetic knife strips	0.40	2
Colour-coded board rack + boards	4 boards	1
Rice cookers 5 L (jasmine, sticky)	Ø 0.26	2
Stone mortar + pestle, granite	Ø 0.22	1
Mixer-grinder, commercial	—	1
Kitchen blowtorch	—	1
Foot-pedal bins (wet, dry)	Ø 0.20 × 0.60	2
Apron hook rail on the door	3 hooks	1
Insect killer	0.50 × 0.18	1
Floor channel drain	3.15 × 0.08	1
Ceiling hatch + fold-down ladder	0.60 × 0.80	1
Extinguishers: Class K 6 L, CO_2 4.5 kg	wall brackets	2
Fire blanket, first-aid box	—	1 each

NOTES

Benches stainless steel 304, 0.90 m high; hot line 0.70 deep.
Kitchen 4.90 × 2.40 m inside; PVC ceiling at 2.70 m with a storage deck above (1.7 m clear) reached by the hatch.
Sized to the Pan-Asian menu: about 23 recipes, 40 choices, one chef + one helper, 35–45 covers a service.
Shelves over the dish line at 1.45 and 1.85 m: plates below, steamer baskets air-dry on the slatted top shelf.
Positions are from the 3D model; check every wall and pillar P2 on site before fabrication.


0 — 1 m — 2 m

PLAN 1:25 on A3 · dimensions in metres


Back wall at the top, dining room at the bottom; left and right as you walk in from the road. Dashed red: canopy hood above.
Dashed blue: ceiling hatch and fridge door swings. Dashed grey: shelves above. Heights, exhaust and services: sheet 2.

Kitchen services and exhaust

For kitchen equipment, exhaust, gas, plumbing and electrical vendors · plan at 1:25 and elevation at 1:40 on A3

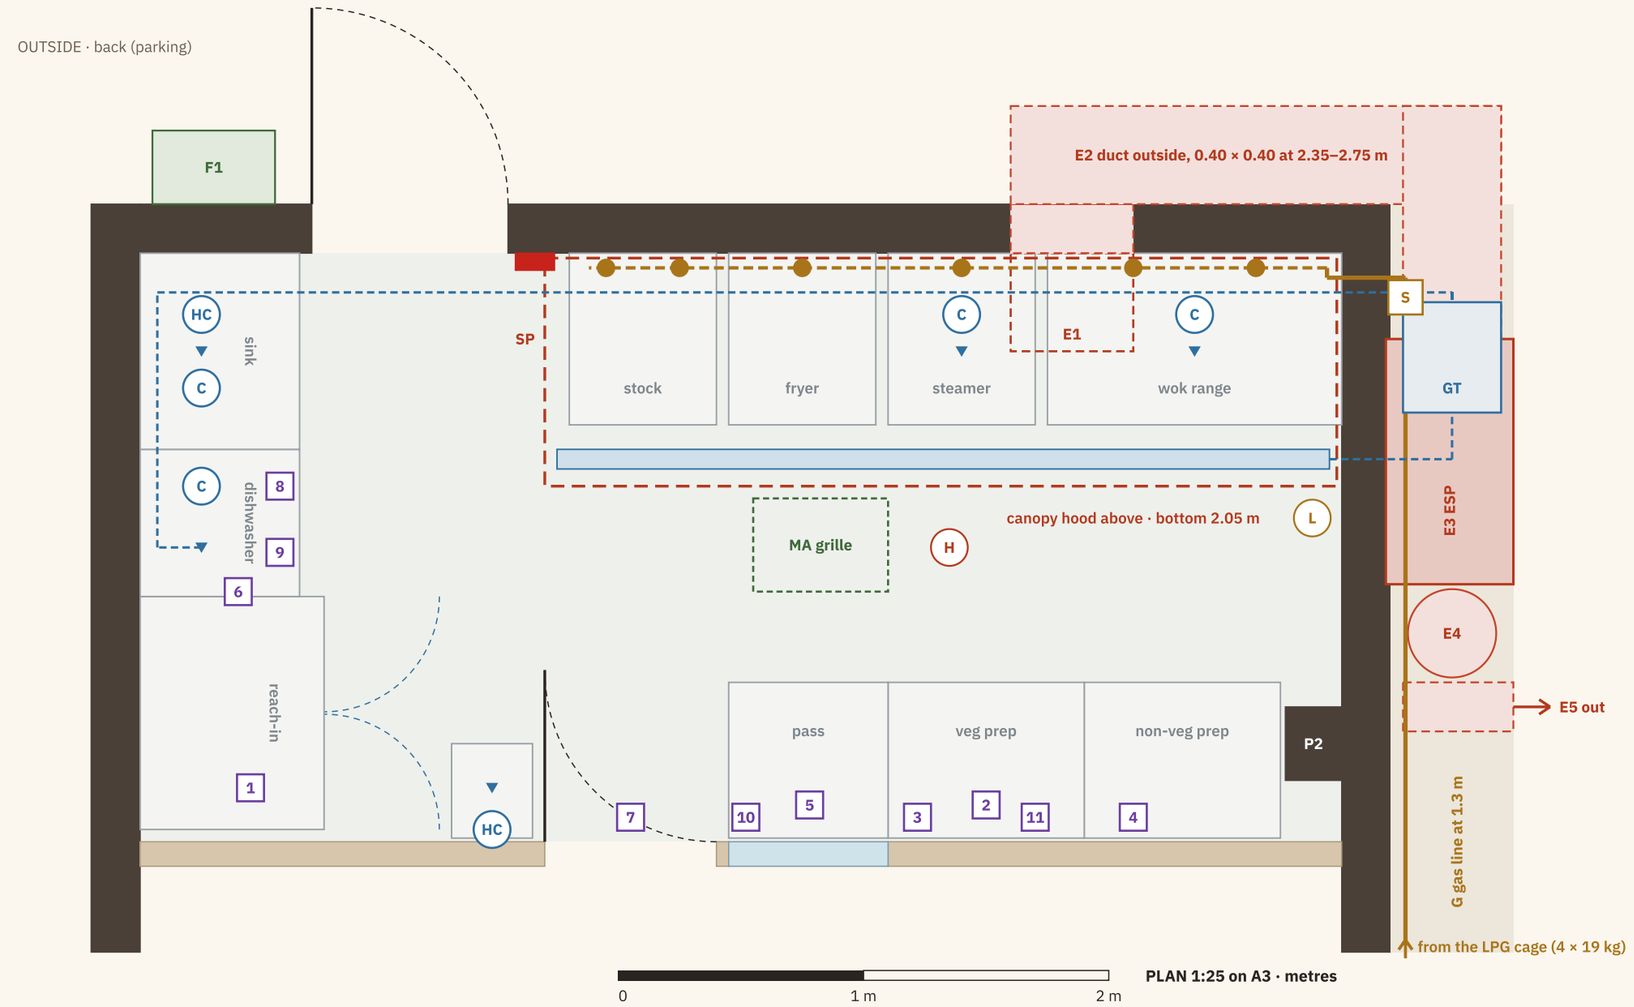

Hot line elevation · back wall seen from inside · 1:40 on A3

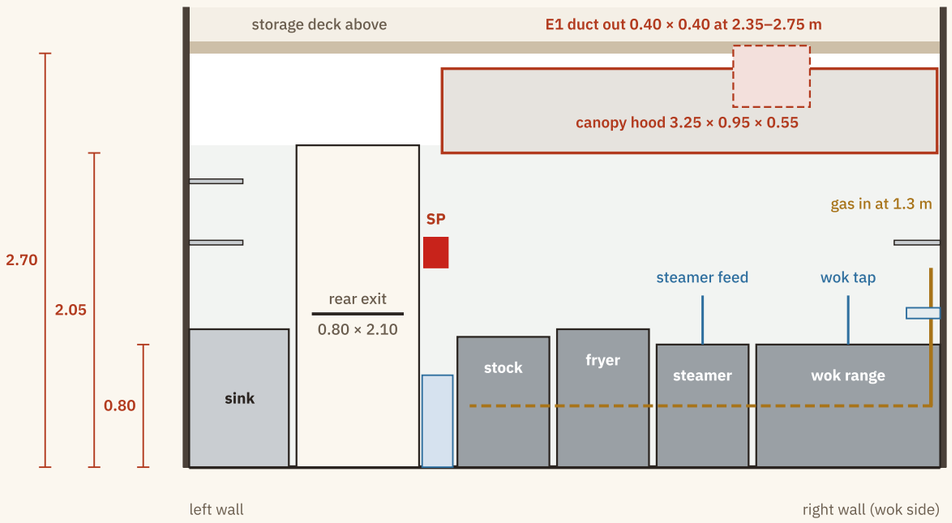

Legend

- canopy hood outline (above)
- exhaust duct, outside, at 2.35–2.75 m
- gas line, copper
- gas manifold at 0.40 m · dot = appliance valve
- S — solenoid shut-off valve
- L — gas leak detector
- HC — water point: hot + cold (C = cold only)
- ▼ — drain point
- drain line to the grease trap
- 1 — power point, see the services list
- make-up (fresh) air grille in the ceiling
- H — heat detector
- SP suppression pull + gas cut-off

Services list

TAG	ITEM	SIZE / NOTE
E1	Duct through the back wall	0.40 × 0.40 at 2.35–2.75 m
E2	Duct along the wall, round the corner	0.40 × 0.40, outside
E3	ESP + carbon odour filter	0.50 × 1.00 × 0.90, 2.05–2.95 m
E4	Inline exhaust fan	Ø 0.44 · on backup
E5	Side discharge, mesh + rain cowl	0.40 × 0.40 at ~2.6 m
F1	Fresh-air intake fan, back wall	0.50 × 0.48 at 3.3 m
MA	Make-up air grille, ceiling	0.55 × 0.38
G	LPG line, copper, from the cage	at 1.3 m, in at the back corner
S	Solenoid valve on the entry, outside	interlocked: fan + suppression
SP	Hood suppression pull + gas cut-off	at the rear exit, 1.3–1.5 m
GT	Grease trap, outside back corner	0.45 × 0.45
1	Reach-in fridge	1-ph socket · on backup
2	Under-counter freezer	1-ph socket · on backup
3	Two rice cookers	twin 1-ph socket
4	Chilled mise-en-place rail	1-ph socket · on backup
5	Heat lamps over the pass	1-ph, switched
6	Dishwasher	1-ph or 3-ph: confirm model
7	Insect killer	1-ph
8	Hood-light switch	left wall, by panel 9
9	Exhaust fan + ESP control panel	left wall over the DW · on backup
10	Pass under-counter fridge	1-ph socket · on backup
11	Mixer-grinder	1-ph socket, 16 A

EXHAUST

Allow about 4,000–5,000 m³/h for the whole hood (vendor to size); about 8 m/s in the 0.40 × 0.40 duct. ESP + carbon filter before the fan. No roof stack: apartment above, parking behind. Make-up air about 80% of the exhaust, interlocked.

GAS

4 × 19 kg LPG in a locked, ventilated cage on the right strip. A valve per appliance; solenoid shuts off with the fan or the hood suppression; leak detector at the line entry.

WATER + DRAINS

All kitchen drains to the grease trap, then the grey-water line (never the biodigester). Epoxy floor falls to the channel drain.

POWER

Shop supply: three-phase, about 15–20 kW. Backup 7.5 kVA covers the fridges, rails, fan, ESP, lights. Not the ACs.