
Kitchen equipment layout

For commercial kitchen equipment vendors · plan at 1:25 on A3 · every item named and sized on the drawing

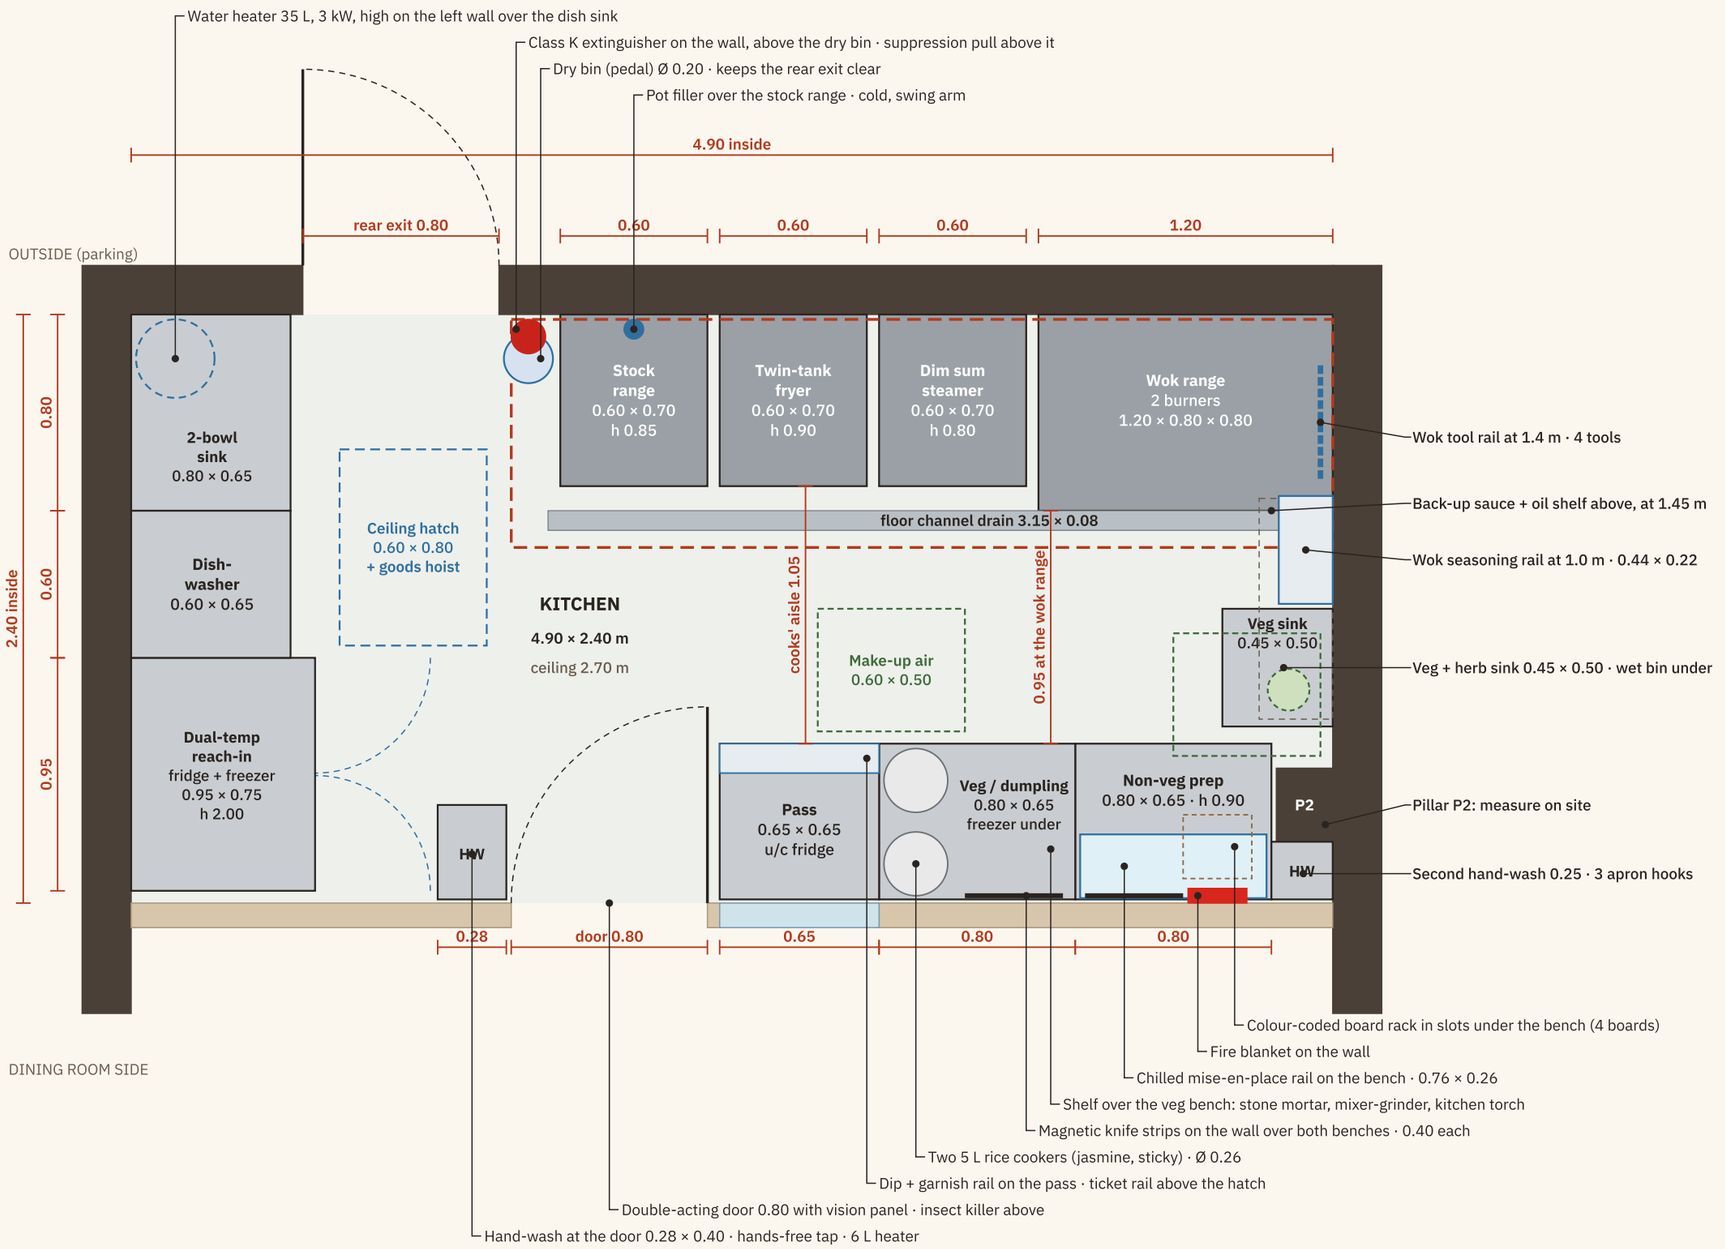

0 — 1 m — 2 m

PLAN 1:25 on A3 · dimensions in metres

Back wall at the top, dining room at the bottom; left and right as you walk in from the road. Dashed red: canopy hood above (3.35 × 0.95, bottom 2.05 m).

Dashed blue: hatch and fridge doors. Dashed green: make-up air diffusers above (2). Dashed grey: shelves above. Heights and services: sheet 2.

Equipment list


EQUIPMENT	W × D × H (m)	QTY
Wok range, 2 burners (Chinese)	1.20 × 0.80 × 0.80	1
Dim sum steamer, 2 holes	0.60 × 0.70 × 0.80	1
Twin-tank fryer (veg / non-veg)	0.60 × 0.70 × 0.90	1
Stock range, 2 burners	0.60 × 0.70 × 0.85	1
Canopy hood, baffle filters, suppression	3.35 × 0.95 × 0.55	1
Non-veg prep bench, undershelf, shelf over	0.80 × 0.65 × 0.90	1
Veg / dumpling bench, 2 shelves over	0.80 × 0.65 × 0.90	1
Under-counter freezer (in the veg bench)	2 doors	1
Pass bench + 2 heat lamps, u/c fridge under	0.65 × 0.65 × 0.90	1
Veg + herb wash sink, tall mixer tap	0.45 × 0.50 × 0.90	1
Hand-wash basins, hands-free, 6 L heater each	0.28 × 0.40 · 0.25 × 0.25	2
Dual-temp reach-in (fridge + freezer)	0.95 × 0.75 × 2.00	1
Under-counter dishwasher + drainboard	0.60 × 0.65 × 0.90	1
2-bowl sink + pre-rinse spray	0.80 × 0.65 × 0.90	1
Storage water heater 35 L, 3 kW	Ø 0.33 × 0.50	1
Shelves over the dish line (top one slatted)	1.40 × 0.35	2
Bamboo steamer stacks (3 baskets + lid)	Ø 0.26	3
Pot filler, wall swing arm (cold)	0.30 reach	1
Used-oil can 20 L + spill tray	0.34 × 0.17 × 0.40	1
Wok seasoning rail, 8 pots + 8 bottles	0.44 × 0.22	1
Wok tool rail: ladle, spatula, spider, brush	0.47	1
Back-up sauce + oil shelf	0.90 × 0.30	1
Chilled mise-en-place rail, 5 pans	0.76 × 0.26 × 0.22	1
Dip + garnish rail (5 inserts)	0.65 × 0.12	1
Ticket rail over the pass hatch	0.65	1
Magnetic knife strips	0.40	2
Colour-coded board rack + boards	4 boards	1
Rice cookers 5 L (jasmine, sticky)	Ø 0.26	2
Stone mortar + pestle, granite	Ø 0.22	1
Mixer-grinder, commercial	—	1
Kitchen blowtorch	—	1
Foot-pedal bins (wet under veg sink, dry)	Ø 0.20 × 0.60	2
Apron hook rail at the prep corner	3 hooks	1
Double-acting door, vision panel, kick plate	0.80 × 2.05	1
Make-up air diffusers, ceiling	0.60 × 0.50	2
Insect killer	0.50 × 0.18	1
Floor channel drain	3.15 × 0.08	1
Ceiling hatch + fold-down ladder	0.60 × 0.80	1
Goods hoist 200 kg over the hatch	—	1
Extinguisher Class K 6 L (CO_2 at the door)	wall bracket	1
Fire blanket, first-aid box	—	1 each
OUTSIDE + SERVICES (details on sheet 2)		
LPG bank: cage + 5 × 19 kg cylinders	0.35 × 1.70 × 1.60	1
Gas: solenoid valve, valve per appliance, leak detector	copper, 1 set	1
Exhaust: ESP + carbon filter, outside	0.50 × 1.00 × 0.90	1
Inline exhaust fan, anti-vibration mounts	Ø 0.44	1
Fresh-air intake fan, back wall, high	0.50 × 0.48	1
Cooling coil 1.5 TR + condenser (make-up air)	0.80 × 0.55 × 0.30	1
Grease trap, outside back corner	0.45 × 0.45	1
Water cabinet: pump, filter, softener	0.45 × 0.80 × 1.50	1
Water sump, buried, 1,000 L	1.3 × 1.0 × 0.8	1
Heat detector, kitchen ceiling	—	1
Sockets 1–14, fan + ESP control panel	sheet 2	1 set

NOTES

Stainless steel 304 benches, 0.90 m high; hot line 0.70 deep, wok range 0.80. Cooks' aisle 1.05 m (0.95 m at the wok range).
Cement-board ceiling at 2.70 m; storage deck above, hoist at the hatch.
Pan-Asian menu: about 23 recipes, 40 choices; one chef + one helper.
Price against the BOQ (boq.html): item numbers, units, quantities.
Positions are from the 3D model: check walls and pillar P2 on site.

Kitchen services and exhaust

For kitchen equipment, exhaust, gas, plumbing and electrical vendors · plan at 1:25 and elevation at 1:40 on A3

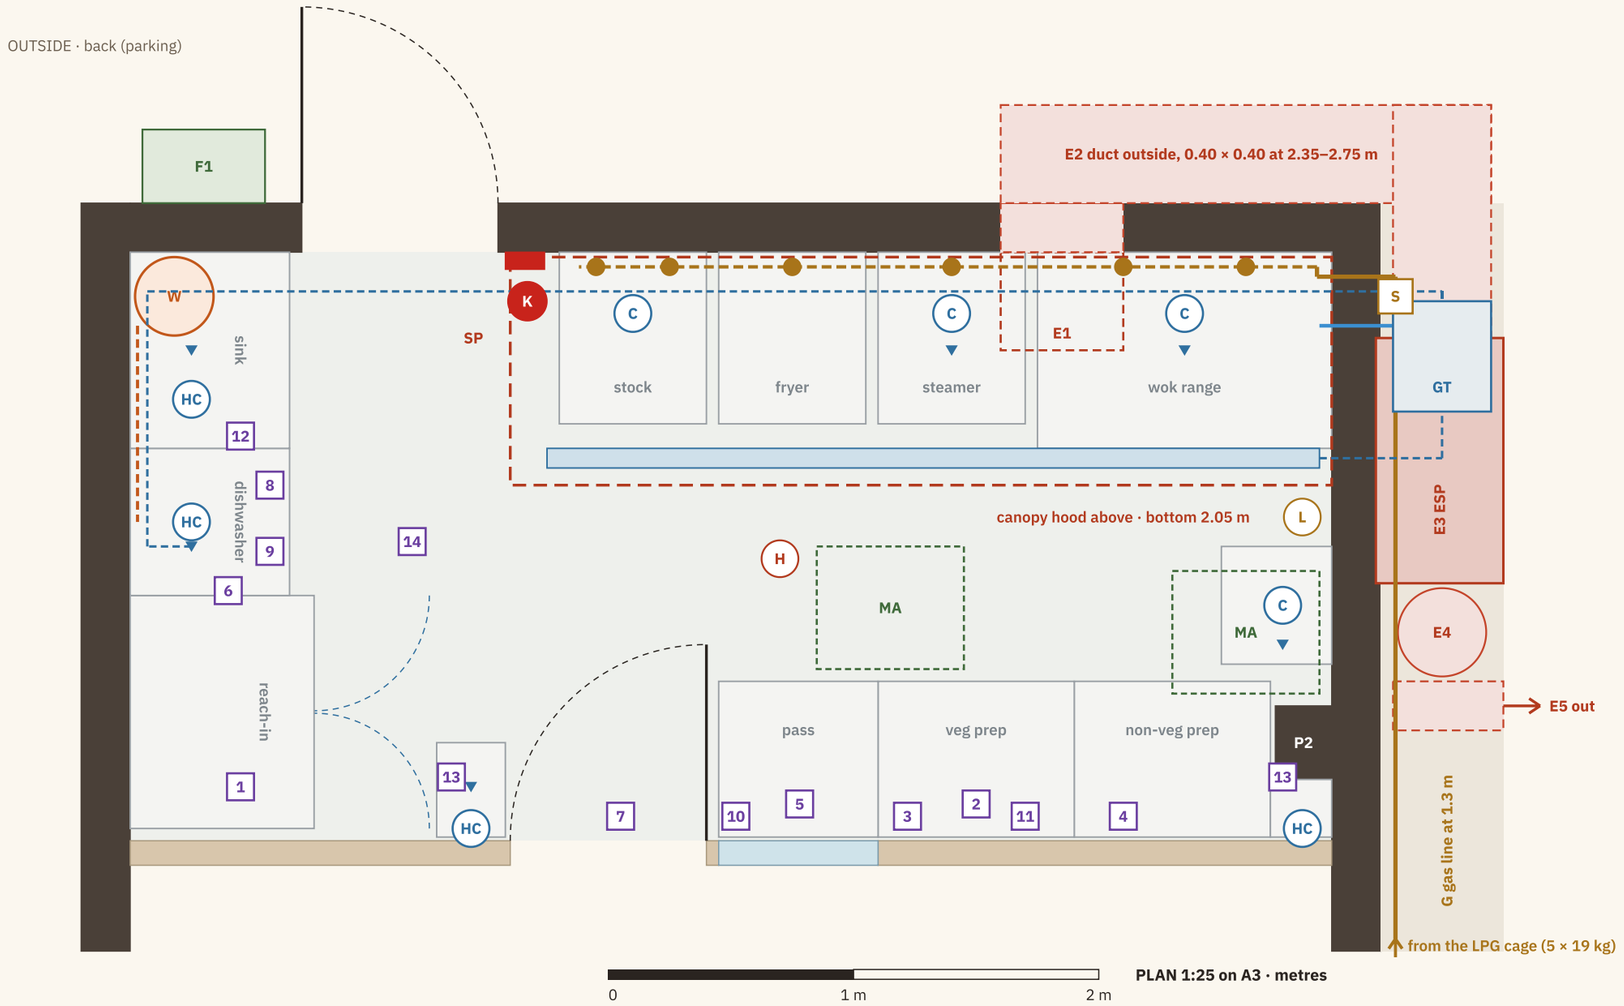

Services list

TAG	ITEM	SIZE / NOTE
E1	Duct through the back wall	0.40 × 0.40 at 2.35–2.75 m
E2	Duct along the wall, round the corner	0.40 × 0.40, outside
E3	ESP + carbon odour filter	0.50 × 1.00 × 0.90, 2.05–2.95 m
E4	Inline exhaust fan	Ø 0.44 · on backup
E5	Side discharge, mesh + rain cowl	0.40 × 0.40 at ~2.6 m
F1	Fresh-air intake fan, back wall	0.50 × 0.48 at 3.3 m
MA	Make-up air diffusers ×2, ceiling	0.60 × 0.50 each · ~2.4 m/s
CC	Cooling coil in the make-up duct	1.5 TR · 3rd condenser on the wall
G	LPG line, copper, from the cage	at 1.3 m, in at the back corner
S	Solenoid valve on the entry, outside	interlocked: fan + suppression
SP	Hood suppression pull + gas cut-off	at the rear exit, 1.3–1.5 m
GT	Grease trap, outside back corner	0.45 × 0.45
W	Storage water heater, 3 kW	35 L · left wall over the sink
PF	Pot filler, cold, swing arm	over the stock range
WC	Water cabinet: pump, filter, softener	outside, 1.2–2.0 m · on backup
SU	Water sump, buried	1,000 L · 1.3 × 1.0 × 0.8 · garden
1	Reach-in fridge	1-ph socket · on backup
2	Under-counter freezer	1-ph socket · on backup
3	Two rice cookers	twin 1-ph socket
4	Chilled mise-en-place rail	1-ph socket · on backup
5	Heat lamps over the pass	1-ph, switched
6	Dishwasher	1-ph or 3-ph: confirm model
7	Insect killer	1-ph
8	Hood-light switch	left wall, by panel 9
9	Exhaust fan + ESP control panel	left wall over the DW · on backup
10	Pass under-counter fridge	1-ph socket · on backup
11	Mixer-grinder	1-ph socket, 16 A
12	Water heater isolator	own 3 kW MCB
13	Hand-wash heaters ×2	1 kW each, 6 L
14	Goods hoist over the hatch	200 kg · 0.4 kW

EXHAUST + AIR

Allow about 4,000–5,000 m³/h for the whole hood (vendor to size); about 8 m/s in the 0.40 × 0.40 duct. ESP + carbon filter before the fan. No roof stack: apartment above, parking behind. Hood overhang 0.20 m at the open end, 0.15 m over the wok range. Make-up air about 80% of the exhaust through two low-velocity diffusers (~2.4 m/s), cooled by a 1.5 TR coil, interlocked.

GAS

5 × 19 kg LPG (4 on the manifold + 1 full spare = 95 kg) in a locked cage on the right strip. Typical load: wok 2 × 18, stock 2 × 8, fryer 18, steamer 11 kW = about 80 kW connected, 55 kW at once; 4 cylinders give about 60–75 kW in Goa: vendor to confirm the burner ratings, add a vaporiser if they are higher. A valve per appliance; solenoid shuts off with the fan or the suppression; leak detector low on the right wall.


WATER + DRAINS

Cold: 1,000 L buried sump → pump, filter, softener cabinet (on backup) → kitchen. Hot: 35 L heater for the sink and pre-rinse, 6 L heaters under both hand-wash basins, dishwasher with its own booster. All kitchen drains to the grease trap, then the grey-water line (never the biodigester).

POWER

Shop supply: three-phase, about 15–20 kW. Backup 7.5 kVA covers the fridges, rails, fan, ESP, lights and the water pump. Not the ACs.

Hot line elevation · back wall seen from inside · 1:40 on A3

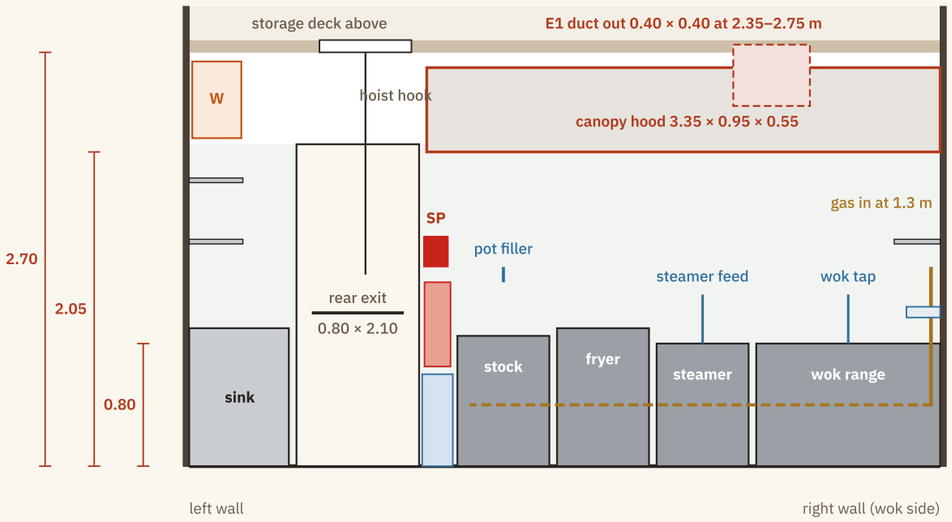

Legend

- canopy hood outline (above)
- exhaust duct, outside, at 2.35–2.75 m
- gas line, copper
- gas manifold at 0.40 m · dot = appliance valve
- S — solenoid shut-off valve
- L — gas leak detector
- HC — water point: hot + cold (C = cold only)
- hot water from the 35 L heater (W)
- cold water main in (WM)
- drain point
- drain line to the grease trap
- 1 — power point, see the services list
- make-up air diffusers in the ceiling (MA, 2)
- H — heat detector
- SP suppression pull + gas cut-off · K = Class K extinguisher