
Kitchen layout · Betalbatim pub


For commercial kitchen equipment vendors · kitchen 4.90 × 2.40 m inside, ceiling 2.70 m · all dimensions in metres · tags match the equipment schedule

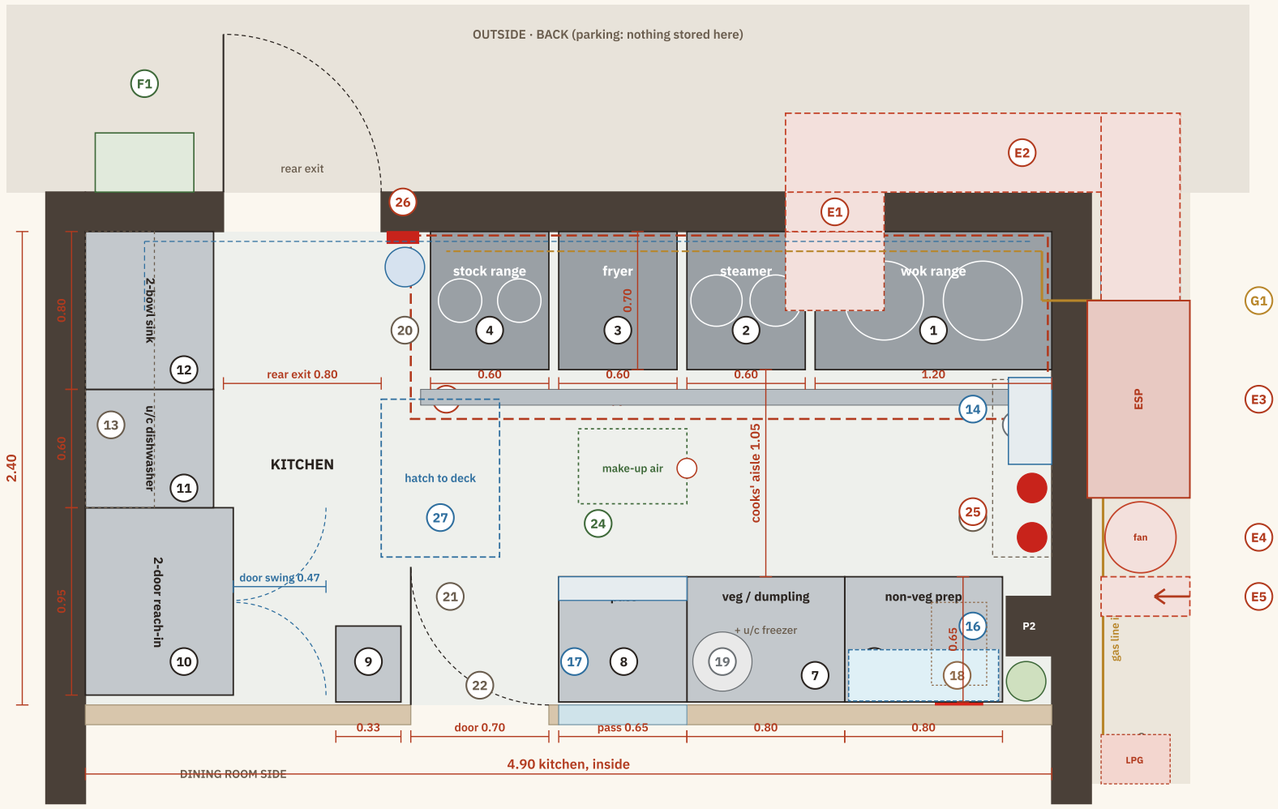

0 1 m 2 m

PLAN · 1:25 at A3 · back wall at the top, dining room at the bottom; left and right as you walk in from the road

Hot line elevation · back wall seen from inside the kitchen · 1:40

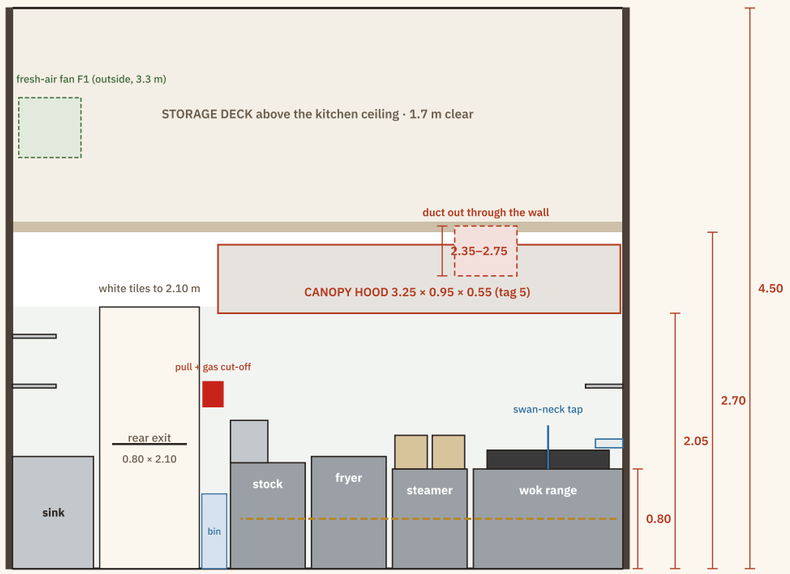

left wall (dish line) right wall (wok side)

Dashed gold line: gas manifold behind the hot line at 0.40 m, solenoid valve where the line enters

Equipment schedule

TAG	ITEM	SIZE W × D × H (m)	SERVICES
1	Chinese wok range, 2 burners	1.20 × 0.70 × 0.80	gas (2 burners) · water (swan-neck tap) · drain
2	Dim sum steamer, 2 holes	0.60 × 0.70 × 0.80	gas · water auto-fill · drain
3	Twin-tank fryer (veg / non-veg oil)	0.60 × 0.70 × 0.90	gas
4	Stock range, 2 burners	0.60 × 0.70 × 0.85	gas
5	Canopy hood, baffle filters, lights	3.25 × 0.95 × 0.55, bottom 2.05	exhaust · wet-chemical suppression · 1-ph
6	Non-veg prep bench, open undershelf, shelf over	0.80 × 0.65 × 0.90	1-ph socket
7	Veg / dumpling bench + u/c freezer, 2 shelves over	0.80 × 0.65 × 0.90	1-ph (freezer) · socket
8	Pass bench, 2 heat lamps, hatch 0.65 × 0.60	0.65 × 0.65 × 0.90	1-ph (lamps)
9	Hand-wash sink at the door, hands-free tap	0.33 × 0.40	hot + cold · drain
10	Slim 2-door reach-in fridge	0.95 × 0.75 × 2.00	1-ph · on backup
11	Under-counter dishwasher + drainboard	0.60 × 0.65 × 0.90	cold · drain · 1-ph / 3-ph (confirm)
12	2-bowl sink + pre-rinse spray	0.80 × 0.65 × 0.90	hot + cold · drain to grease trap
13	Clean-plate shelves over the dish line (2)	1.40 × 0.35 at 1.45 / 1.85	—
14	Wok seasoning rail: 8 pots + 8 squeeze bottles	0.44 × 0.22 at 1.00	—
15	Back-up sauce + oil shelf	0.90 × 0.30 at 1.45	—
16	Chilled mise-en-place rail, 5 pans (counter-top)	0.76 × 0.26 × 0.22	1-ph
17	Dip + garnish rail at the pass · ticket rail	0.65 × 0.12	—
18	Knife strips (2) · colour-coded board rack	0.40 long · rack under bench 6	—
19	10 L rice cooker	Ø 0.30	1-ph
20	Foot-pedal bins: wet, dry	Ø 0.20 × 0.60 each	—
21	Kitchen door with 3 apron hooks (inside)	0.70 × 2.05, opens in	—
22	Insect killer over the door	0.50 × 0.18	1-ph
23	Floor channel drain in front of the hot line	3.15 × 0.08	to grease trap
24	Make-up (fresh) air ceiling grille	0.55 × 0.38	from fan F1 · interlocked
25	Class K + CO_2 extinguishers, fire blanket, heat detector	wall brackets	—
26	Hood suppression manual pull + gas cut-off	by the rear exit	interlocked with gas + fan
27	Hatch + fold-down ladder to the storage deck	0.60 × 0.80 opening	—
E1	Duct through the back wall (hood collar 0.50 × 0.25)	0.40 × 0.40 at 2.35–2.75	exhaust
E2	Duct along the back wall, round the corner, forward	0.40 × 0.40, outside	exhaust
E3	ESP + carbon odour filter	0.50 × 1.00 × 0.90 at 2.05–2.95	1-ph · on backup
E4	Inline exhaust fan	Ø 0.44	1-ph / 3-ph · on backup
E5	Side discharge away from the building, mesh + cowl	0.40 × 0.40 at 2.4–2.8	—
F1	Fresh-air intake fan, back wall	0.50 × 0.48 at 3.3	1-ph · interlocked
G1	LPG copper line in from the cage (4 × 19 kg)	along the outside wall at 1.3	solenoid + leak detector
GT	Grease trap, outside back corner	0.45 × 0.45	all kitchen drains

BASIS

22-dish menu: Tangra Indo-Chinese wok dishes, dim sum, bao, Korean bar food; about 60–80 covers a day in season. One wok cook, one prep cook, one dishwasher.

EXHAUST

One canopy hood over all four appliances. Allow about 4,000–5,000 m³/h (vendor to size) with ~8 m/s in the 0.40 × 0.40 duct. ESP + carbon filter before the fan; side discharge at ~2.6 m: there is an apartment above (no roof stack) and parking behind. Make-up air about 80% of the exhaust through ceiling grille 24 from fan F1, interlocked. Fan, ESP on backup power.

GAS

LPG 4 × 19 kg in a locked, ventilated cage on the right side strip; copper line G1 along the outside wall at 1.3 m, in behind the wok range; manifold with a valve per appliance; solenoid shut-off interlocked with the exhaust fan and the hood suppression; leak detector.

WATER + DRAINS

Hot + cold to the sink, pre-rinse and hand-wash; cold to the dishwasher, wok tap and steamer. All kitchen drains and the channel drain go to grease trap GT, then the grey-water line (never the biodigester). Epoxy floor laid to fall to the channel drain.

POWER + FINISHES

1-ph points as listed; confirm the dishwasher and fan supply. The shop needs a 3-phase connection of about 15–20 kW. Fridge, freezer, chilled rail, fan and ESP on the 7.5 kVA backup. Benches SS 304 at 0.90 m; white wall tiles to 2.10 m; PVC ceiling at 2.70 m.

CHECK ON SITE

Pillar P2 (right wall) and the beams are estimates: measure before fabrication. Kitchen door 0.70 opens in; rear exit 0.80 opens out with a panic bar; keep it clear.